

Submersible Sewage Pump Type ABS XFP 80C - 206G

SULZER

Robust, reliable, submersible pumps, with Premium Efficiency motors from 1.8 to 30.0 kW. For the pumping of wastewater and sewage from buildings and sites in private, commercial, industrial and municipal areas.

Features

- The water-pressure-tight, encapsulated, flood-proof motor and the pump section form a compact, robust, modular construction.
- NEMA Class A temperature rise.
- Premium Efficiency motors in accordance with IEC 60034-30 level IE3* with testing in accordance with IEC60034-2-1.
- Continuously rated motor in submerged and non-submerged applications.
- Double mechanical seals. SiC-SiC at the medium side; SiC-C (80C - 150E) and SiC-SiC (100G - 206G) at the motor. XFP 100G - 206G has an additional inner lipseal at the motor side. All seals are independent of rotation direction and resistant to temperature shock.
- Anti-wicking cable plug solution (80C - 150E), or water-pressure-sealed connection chamber (100G - 206G).
- Hydraulic options of Contrablock and Contrablock Plus impellers for high efficiency, or vortex impellers for maximum solids handling.
- Lubricated-for-life bearings with a calculated lifetime of minimum 50,000 hrs. (80C - 150E), and 100,000 hrs. (100G - 206G).
- Stainless steel shaft. Designed with high safety factor to prevent fatigue fracture.
- Temperature monitoring by thermal sensors (140 °C) in the stator windings.
- Seal monitoring by a moisture probe (DI) in the motor and seal chambers (80C - 150E), or motor and oil chambers (100G - 206G), which signals an inspection alert if there is leakage at the shaft seals.
- Smooth outer design to reduce rag build-up.
- Stainless steel lifting hoop.
- DN 80, DN 100, DN 150 and DN 200 radial slot DIN flange discharge.
- Maximum allowable temperature of the medium for continuous operation is 40 °C.
- Maximum submergence depth of 20 m.
- Explosion-proof as standard, in accordance with international standard ATEX 2014/34/EU [II 2G Ex h db IIB T4 Gb].

* See Technical Data table



Motor

Premium Efficiency IE3* motor.

60 Hz single-phase 230 V, and three-phase 460 V squirrel-cage motor as 2-pole (3400 r/min), 4-pole (1750), 6-pole (1180) and 8-pole (870).

Protection type IP 68, with stator insulation Class H.

Starting: direct on line (DOL) or star-delta (YΔ).

Service factor: 1.3

Motors with other operating voltages and frequencies are also available (DOL and YΔ).

Identification Code: e.g. XFP 80C CB1.3 PE22/4-C-60

Hydraulics:

XFP Product range

8 Discharge outlet DN (cm)

0Hydraulic type

C Volute opening (dia. mm): C = 222, E = 265, G = 335

CB..... Impeller type: CB = Contrablock, VX = vortex

1 Number of impeller vanes

3 Impeller size

Motor:

PE Premium Efficiency

22 Motor power P_2 kW x 10

4 Number of poles

C Volute opening (dia. mm): C = 222, E = 265, G = 335


60 Frequency

Technical data

XFP	Motor	IEC rating	Impeller size	Rated voltage (V)	Motor power *		Rated current (A)	Speed (r/min)	Weight ** (kg)
					P ₁ (kW)	P ₂ (kW)			
80C-CB1	PE 28/4	IE3	5	460 3~	3.1	2.8	5.2	1750	120 / n.a.
	PE 35/4	IE3	4	460 3~	3.9	3.5	6.2	1750	120 / n.a.
	PE 20/6	IE1	1, 2, 4	460 3~	2.4	2.0	4.2	1180	120 / n.a.
	PE 28/4W	IE3	5	230 1~	3.6	2.8	16.9	1750	110 / n.a.
	PE 20/6W	IE1	1, 2, 4	230 1~	2.6	2.0	12.0	1180	120 / n.a.
80C-VX	PE 22/4	IE3	2, 3, 4	460 3~	2.5	2.2	4.6	1750	110 / n.a.
	PE 35/4	IE3	1	460 3~	3.9	3.5	6.2	1750	110 / n.a.
	PE 18/4W	IE3	3, 4	230 1~	2.3	1.8	10.5	1750	110 / n.a.
	PE 28/4W	IE3	2	230 1~	3.6	2.8	16.9	1750	110 / n.a.
80E-CB1	PE 125/2	IE3	4, 5	460 3~	13.7	12.5	21.3	3400	180 / n.a.
81C-VX	PE 45/2	IE3	1	460 3~	5.1	4.5	7.4	3400	120 / n.a.
81E-VX	PE 80/2	IE3	4	460 3~	8.9	8.0	13.3	3400	140 / n.a.
	PE 125/2	IE3	A, 1, 2, 3	460 3~	13.7	12.5	21.3	3400	170 / n.a.
100C-CB1	PE 28/4	IE3	5	460 3~	3.1	2.8	5.2	1750	120 / n.a.
	PE 35/4	IE3	4	460 3~	3.9	3.5	6.2	1750	120 / n.a.
	PE 20/6	IE1	1, 2, 4	460 3~	2.4	2.0	4.2	1180	130 / n.a.
	PE 28/4W	IE3	5	230 1~	3.6	2.8	16.9	1750	130 / n.a.
	PE 20/6W	IE1	1, 2, 4	230 1~	2.6	2.0	12.0	1180	130 / n.a.
100C-VX	PE 22/4	IE3	3, 4, 5	460 3~	2.5	2.2	4.6	1750	120 / n.a.
	PE 28/4	IE3	2	460 3~	3.1	2.8	5.2	1750	120 / n.a.
	PE 35/4	IE3	1	460 3~	3.9	3.5	6.2	1750	120 / n.a.
	PE 18/4W	IE3	4	230 1~	2.3	1.8	10.5	1750	110 / n.a.
	PE 28/4W	IE3	2, 3	230 1~	3.6	2.8	16.9	1750	120 / n.a.
100E-CB1	PE 45/4	IE3	6	460 3~	5.0	4.5	8.2	1750	160 / n.a.
	PE 56/4	IE3	5	460 3~	6.1	5.6	9.9	1750	160 / n.a.
	PE 75/4	IE3	4, 4A, 5	460 3~	8.2	7.5	13.8	1750	170 / n.a.
	PE 90/4	IE3	2, 3, 4	460 3~	9.8	9.0	15.8	1750	190 / n.a.
	PE 105/4	IE3	1, 2, 3	460 3~	11.4	10.5	17.7	1750	200 / n.a.
	PE 35/6	IE2	2, 3, 4, 5	460 3~	4.0	3.5	6.3	1180	170 / n.a.
100E-VX	PE 45/4	IE3	5	460 3~	5.0	4.5	8.2	1750	150 / n.a.
	PE 56/4	IE3	4	460 3~	6.1	5.6	9.9	1750	140 / n.a.
	PE 75/4	IE3	4	460 3~	8.2	7.5	13.8	1750	150 / n.a.
	PE 90/4	IE3	3	460 3~	9.8	9.0	15.8	1750	180 / n.a.
	PE 105/4	IE3	1	460 3~	11.4	10.5	17.7	1750	180 / n.a.
100G-CB1	PE 130/4	IE3	8, 9	460 3~	14.0	13.0	23.2	1750	340 / 390
	PE 150/4	IE3	7, 8, 9	460 3~	16.1	15.0	25.5	1750	340 / 390
	PE 185/4	IE3	6, 7	460 3~	19.8	18.5	32.3	1750	360 / 410
	PE 210/4	IE3	4, 5, 6	460 3~	22.4	21.0	35.4	1750	370 / 410
	PE 250/4	IE3	4, 5	460 3~	26.7	25.0	40.8	1750	380 / 430
	PE 90/6	IE3	2, 3, 4, 5	460 3~	10.0	9.0	18.8	1180	340 / 380
	PE 130/6	IE3	1	460 3~	14.2	13.0	23.7	1180	340 / 380
	PE 110/6	IE3	1, 2, 3	460 3~	12.0	11.0	21.1	1180	340 / 380
100G-CB2	PE 250/4	IE3	1, 2, 3	460 3~	26.7	25.0	40.8	1750	372 / 422
101G-CB1	PE 185/2	IE3	4	460 3~	20.0	18.5	28.4	3400	340 / 380
	PE 200/2	IE3	3, 4	460 3~	21.8	20.0	30.5	3400	330 / 380
	PE 230/2	IE3	2, 3	460 3~	25.1	23.0	35.1	3400	350 / 390
	PE 300/2	IE3	1, 2	460 3~	32.5	30.0	45.8	3400	360 / 410
101G-VX	PE 230/2	IE3	5, 6	460 3~	25.1	23.0	35.1	3400	360 / 400
	PE 300/2	IE3	3, 4, 5, 6	460 3~	32.5	30.0	45.8	3400	370 / 410
150E-CB1	PE 45/4	IE3	7	460 3~	5.0	4.5	8.2	1750	170 / n.a.
	PE 56/4	IE3	6	460 3~	6.1	5.6	9.9	1750	180 / n.a.
	PE 75/4	IE3	5, 6	460 3~	8.2	7.5	13.8	1750	170 / n.a.
	PE 90/4	IE3	4, 5	460 3~	9.8	9.0	15.8	1750	200 / n.a.
	PE 105/4	IE3	4	460 3~	11.4	10.5	17.7	1750	210 / n.a.
	PE 35/6	IE2	4, 5, 6	460 3~	4.0	3.5	6.3	1180	170 / n.a.
150G-CB1	PE 130/4	IE3	8	460 3~	14.0	13.0	23.2	1750	350 / 400
	PE 150/4	IE3	7, 8	460 3~	16.1	15.0	25.5	1750	350 / 400
	PE 185/4	IE3	6, 7	460 3~	19.8	18.5	32.3	1750	380 / 420
	PE 210/4	IE3	4, 5, 6, 7	460 3~	22.4	21.0	35.4	1750	380 / 430
	PE 250/4	IE3	2, 3, 4, 5, 6, 7	460 3~	26.7	25.0	40.8	1750	400 / 460
	PE 350/4	IE3	1, 2, 3, 4, 5	460 3~	37.0	35.0	58.1	1750	410 / 470
	PE 110/6	IE3	1, 2, 3, 4	460 3~	12.0	11.0	21.1	1180	350 / 390
	PE 130/6	IE3	1	460 3~	14.2	13.0	23.7	1180	360 / 400
	151E-CB2	PE 75/4	IE3	4	460 3~	8.2	7.5	13.8	1750
PE 90/4		IE3	2, 3	460 3~	9.8	9.0	15.8	1750	200 / n.a.
PE 105/4		IE3	1	460 3~	11.4	10.5	17.7	1750	210 / n.a.
PE 35/6		IE2	1, 2, 3, 4	460 3~	4.0	3.5	6.3	1750	170 / n.a.
155G-CB2	PE 200/6	IE3	1	460 3~	21.5	20.0	32.7	1180	410 / 460
	PE 160/6	IE3	1, 2, 3	460 3~	17.5	16.0	28.4	1180	360 / n.a.
	PE 130/6	IE3	2, 3, 4	460 3~	14.2	13.0	23.7	1180	350 / n.a.
	PE 110/6	IE3	4, 5	460 3~	12.0	11.0	21.1	1180	350 / 390
	PE 90/6	IE3	5	460 3~	10.0	9.0	18.8	1180	350 / 390
200G-CB1	PE 90/6	IE3	3, 4	460 3~	10.0	9.0	18.8	1180	390 / 430
	PE 110/6	IE3	1, 2	460 3~	12.0	11.0	21.1	1180	390 / 430
	PE 130/6	IE3	1	460 3~	14.2	13.0	23.7	1180	390 / 430
201G-CB2	PE 130/6	IE3	6	460 3~	14.2	13.0	23.7	1180	390 / 430
	PE 160/6	IE3	4, 5	460 3~	17.5	16.0	28.4	1180	400 / 440
	PE 200/6	IE3	2, 3	460 3~	21.5	20.0	32.7	1180	460 / 500
	PE 120/8	IE3	1, 2	460 3~	13.5	12.0	23.7	870	400 / 440
205G-CB2	PE 350/4	IE3	4	460 3~	37.0	35.0	58.1	1750	460 / 510
	PE 250/4	IE3	4	460 3~	26.7	25.0	40.8	1750	440 / 490
	PE 90/6	IE3	4	460 3~	10.0	9.0	18.8	1180	400 / 440
	PE 130/6	IE3	1, 2	460 3~	14.2	13.0	23.7	1180	410 / 450
	PE 160/6	IE3	1	460 3~	17.5	16.0	28.4	1180	390 / n.a.
	PE 110/6	IE3	2, 3	460 3~	12.0	11.0	23.7	1180	380 / 420
206G-CB2	PE 200/6	IE3	3, 4	460 3~	21.5	20.0	32.7	1180	450 / 500
	PE 250/6	IE3	3	460 3~	26.9	25.0	39.8	1180	480 / 530
	PE 160/6	IE3	4, 5	460 3~	17.5	16.0	28.4	1180	445 / 485
	PE 130/6	IE3	5	460 3~	14.2	13.0	23.7	1180	430 / 470
	PE 120/8	IE3	2, 3, 4, 5	460 3~	13.5	12.0	23.7	870	390 / 430


* P₁ = power at mains. P₂ = power at motor shaft. **Without / with cooling jacket; includes 15 m cable. Data for alternative voltages available on request. Cable data for EMC and alternative start options available on request.

Performance fields with Contrablock impeller

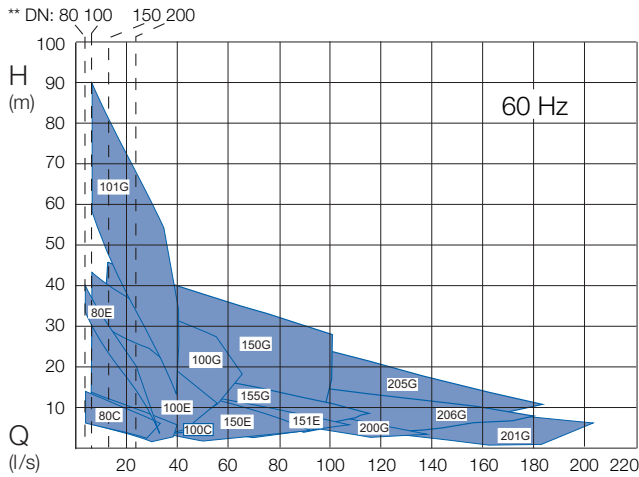

* Minimum flow rate Q

Performance fields with vortex impeller

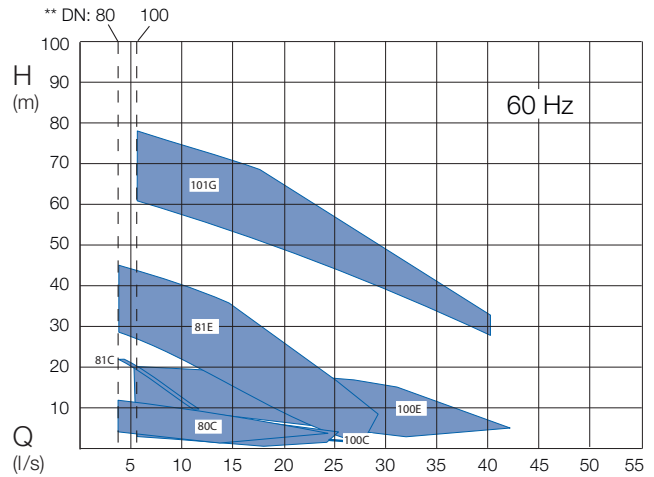

Please use the ABSEL program as the only valid selection tool.

Standard and options

Description	Standard	Option
Mains voltage	460 V 3~	220, 230, 380 V 3~*
Voltage tolerance	± 10%	-
Motor efficiency	Premium Eff. IE3**	-
Insulation class	H	-
Start-up	Direct on line (DOL), star-delta (YΔ)	-
Approvals	Ex / ATEX	-
Mechanical seal (at medium side)	SiC-SiC-NBR	SiC-SiC-Viton
Mechanical seal (at motor side)	SiC-C-NBR (80C - 150E), SiC-SiC-NBR (100G - 206G)	-
O-rings (external seals)	NBR	Viton (not available for cable entry seal)
Cables	NBR	EMC
Cable length (m)	10	20, 30
Protective coating	2k Epoxy 120 µm	2k Epoxy 400 µm
Preparation for lifting hoist	Lifting hoop	-
Cooling	Self-cooling (80C - 150E); by the medium (100G - 206G)	Closed cooling (100G - 206G)
Installation	Wet-well	Dry well*** or transportable

* Selected motors only. Contact Sulzer for details. ** See Technical Data table. *** Except XFP 80E and 81E.

Monitoring

Description		Standard	Option
Motor (temperature)	Bi-metallic switch in windings PTC thermistor in windings	● -	- ●*
Seals (leakage)	Moisture sensor (DI) in motor and seal chambers (80C - 150E) Moisture sensor (DI) in motor and oil chambers (100G - 206G)	● ●	- -

Temperature and leakage relays are required. See accessories table.

* Must be selected when pump is operated via VFD.

Materials

Description	Material	Option
Motor housing	Cast iron EN-GJL-250	-
Cooling jacket	Cast iron EN-GJL-250	-
Volute	Cast iron EN-GJL-250	Ceramic coated EN-GJL-250*
Impeller	Cast iron EN-GJL-250	Stainless steel 1.4470 (AISI 329)*, Flame hardened or ceramic coated EN-GJL-250*
Bottom plate	Cast iron EN-GJL-250	Stainless steel 1.4470 (AISI 329)*, Flame hardened or ceramic coated EN-GJL-250*
Motor shaft	Stainless steel 1.4021 (AISI 420)	-
Lifting hoop	Stainless steel 1.4401 (AISI 316)	-
Fasteners	Stainless steel 1.4401 (AISI 316)	-

* Selected models only. Contact Sulzer for details.

Accessories

	Description	Size	XFP	Part no.	
Fixed installation - wet well with Sulzer Automatic Coupling System	Pedestal* (cast iron EN-GJL-250) 90° cast bend (single guide rail) - DIN flange connection	DN 80 DN 100 DN 100 (high-head) DN 150 DN 200	80C, 81C, 80E, 81E 100C, 100E, 100G 101G 150E, 151E, 150G 155G 205G, 206G 200G & 201G	62320649 62320652 DPR32211F 62320655 DPS91211F DPT91211F 62320658	
	90° cast bend (single guide rail) - plug/clamp connection	DN 80 (pipe Ø 90 mm) DN 100 (pipe Ø 109 mm) DN 100 (pipe Ø 115 mm) DN 150 (pipe Ø 160 mm) DN 150 (pipe Ø 169 mm)	80C, 81C, 81E 100C, 100E, 100G 100C, 100E, 100G 150E, 151E, 150G 150E, 151E, 150G	62320650 62320653 62320654 62320656 62320657	
	90° cast bend (twin guide rail) - DIN flange connection	DN 80 DN 100 DN 150 DN 200	80C, 81C, 80E, 81E 100C, 100E, 100G 150E, 151E, 150G 155G, 200G, 201G, 205G, 206G	62325025 62325026 62325027 62325028	
	Pedestal bracket fasteners single guide rail version (galvanised steel)		80C - 81E 100C - 101G 150E - 155G 200G - 206G	62610632 62610633 62610635 62610883	
	single guide rail version (stainless steel)		80C - 81E 100C - 101G 150E - 155G 200G - 206G	62610899 62610637 62610639 62610862	
	twin guide rail version (galvanised steel)		80C - 81E 100C - 101G 150E - 155G 200G - 206G	62615053 62615054 62615055 62615056	
	Pedestal base anchor bolts single and twin guide rail (galvanised steel)		80C - 101G 150E - 155G 200G - 206G	62610775 62610784 62610785	
	Chain Kits (stainless steel) including shackle Working load limit (WLL) 320 kg	1.6 m 3.0 m 4.0 m 6.0 m 7.0 m	See pump weights for selection	310101395001 310101236003 310101236004 310101236006 310101236007	
	Working load limit (WLL) 400 kg	3.0 m 4.0 m 6.0 m 7.0 m	See pump weights for selection	310101236013 310101236014 310101236016 310101236017	
	Working load limit (WLL) 630 kg	3.0 m 4.0 m 6.0 m 7.0 m	See pump weights for selection	310101236033 310101236034 310101236036 310101236037	
	Fixed installation - dry well, (horizontal)	Pump Support Kit (EN-GJL-250) head and volute supports with fixing bolts and vibration damper	80C 80C**,81C, 100C 81E*** 100E 150E, 151E 101G 100G - 206G, 101G**	61825023 61825033 61825038 61825030 61825031 61825036 61825037	
			Ground Support Stand	80C, 81C 81E*** 100C 100E 150E, 151E 101G 100G - 206G, 101G**	61355014 61355020 61355015 61355021 61355022 61355024 61355023
				Adapter kit (required with support stand)	80C***. 100C***.
	Transportable	Skirtbase		80C, 81C, 100C 80E & 81E 100E 150E, 151E 101G 100G - 206G, 101G**	61355016 61355017 61355018 61355019 61355026 61355025
General	Cathodic Protection (zinc anodes)		80C - 206G	13905000	
	Leakage Relay Type ABS CA 461	110 - 230 VAC 18 - 36 VDC, SELV	80C - 206G	16907010 16907011	
	Temperature and Leakage Relay Type ABS CA 462	110 - 230 VAC 18 - 36 VDC, SELV	80C - 206G	16907006 16907007	

*Guide rail not included **Vortex version of pumps (VX) *** Only with PE 80/2 motor